



# COMPREHENSIVE RANGE OF TILING AND GROUTING SOLUTIONS

## **BIG VISION**

“

To Become A Leader in Global Platform and make inroads for products innovation and consumer satisfaction. As a promoters of VENTALO, We are committed to achieving new standards of excellence by providing superior quality management combined with effective services and maximizing the potential of through the delivery of the most reliable, responsive system which ensure the best end results.

- VENTALO

”

## **BIG PLANS FOR MODERN MARKETING & MANAGEMENT**

We've had an amazing journey coming to where we are today. and now feel confident that we can provide you a professional and effective solution in a timely manner. We have extensive skills in the following areas.

VENTALO always make emphasis on long term view, let it be a Vision, Technology, Product, Sales Network or Branding approach, We always make intensive efforts to make the products best in quality and design and also make sure that product will represent the market in each area of the its sales network, and that's way management leading the market with proper placement along with proper branding & advertising.



## About Us

VENTALO CHEMICAL is considered as one of the leading manufacturer and supplier of construction chemical products in India. VENTALO is an ISO 9001:2015 certified company.

VENTALO CHEMICAL is fastest growing Indian company in the field of construction chemical with brand name of VENTALO. Our product range of construction chemical such as TILE adhesives, epoxy & grout, admixtures, sealers and waterproofing solutions.

Our world is nothing more than the extension of our personality. A signature that is individual and unique, an irreplaceable stamp of our soul.

We believe in treating our customers with respect and faith. We integrate honesty, integrity and business ethics into all aspects of our business functioning. To build long term relationships with our customers and provide exceptional customer services by pursuing business through innovation and advanced technology. Purpose to be a leader in construction chemical industry by providing enhanced product, service, relationship and profitability.



# Specialists in System-based installation Solutions

VENTALO. we believe we are not selling just products but offering you world class solution to enable better design and faster execution.


Our installation systems are specially innovated for those who love to experiment with new materials and techniques that lend their creativity a unique touch and standout quality. We will partner you in the quest to push back the boundaries and set fresh benchmarks.



Facade



Pools & Water Bodies



Commercial Flooring



Residential Flooring



Industrial Flooring

# Contents

— VNC-33 Silver	01
— VNC-55 Gold	03
— VNC-77 Platinum	05
— VNC-99 Multi Purpose	07
— Epoxy Grout	09
— Tile Grout	11
— SBR Premium Latex	13
— Grout Admix	15
— Tile Cleaner	17
— Tools	19



Polymer Modified  
**TILE ADHESIVE**

# VNC-33

## Silver

**20kg** NET WEIGHT






## AREAS OF APPLICATION

VENTALO VNC-33 SILVER is a general purpose polymer modified cementitious grey coloured tile adhesive to fix high porosity ceramic tiles on internal floor and wall. It is ready to use tile fixing adhesive and needs no curing.

- High Porosity Tiles on Wall & Floor
- Vitrified Tiles on the Floor
- New Tiling in internal Areas
- Tile on Tile

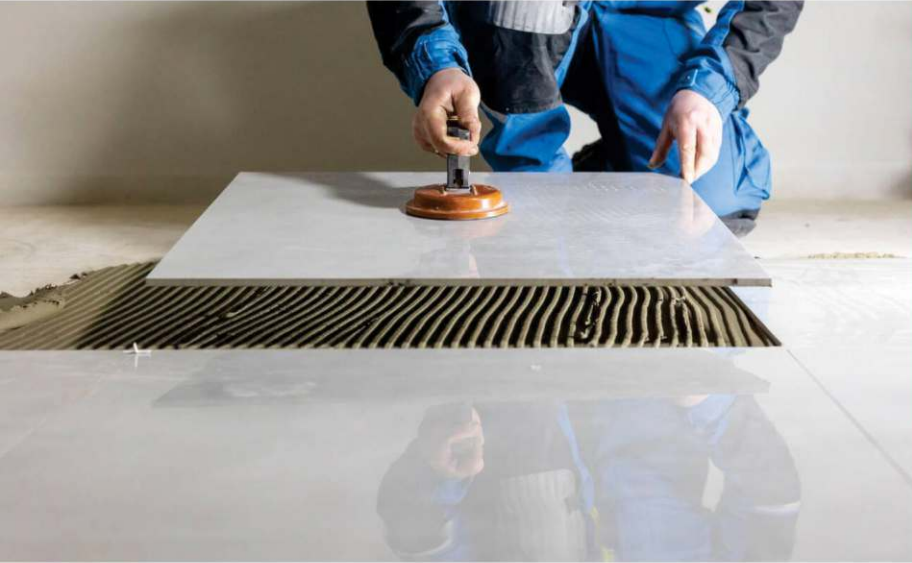

## BENEFITS

- Polymer Modified Additives
- High Bond Strength Ready to use
- Self Curing Good Pot Life
- Applicator Friendly
- Higher Coverage

# VNC-33 Silver

Polymer Modified  
**TILE ADHESIVE**

**SHELF LIFE :** 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 1 | EN 12004 C1 E

### TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey Powder	>60 Minutes	>20 Minutes	0.50 MPa	1.00 MPa	30-35 Sq.Ft. @3mm Bed Thickness



# Polymer Modified TILE ADHESIVE

# VNC-55 Gold

**20kg** NET WEIGHT





## AREAS OF APPLICATION

VENTALO VNC-55 GOLD is a polymer modified adhesive to fix all type of tiles on the floor and wall. It forms a waterproof barrier between two surfaces and has excellent grab properties.

- Wall Application 2X4 upto 15 ft.
- Small window Framing
- Tile On Tile
- Indoor & Outdoor



## BENEFITS

- Polymer Modified Additives
- High Bond Strength Ready to use
- Ready to use Self Curing
- Long Lasting Low VOC Applicator Friendly
- Higher Coverage

# VNC-55 Gold

Polymer Modified  
**TILE ADHESIVE**

**SHELF LIFE :** 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 1 | EN 12004 C2 T

### TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey Powder	>60 Minutes	>20 Minutes	1.00 N/mm <sup>2</sup>	1.00 N/mm <sup>2</sup>	30-35 Sq.Ft. @3mm Bed Thickness



# Polymer Modified **TILE ADHESIVE**

# VNC-77 Platinum

**20kg** NET WEIGHT



## AREAS OF APPLICATION

VENTALO VNC-77 PLATINUM is a Special Purpose polymer modified cementitious grey/white coloured tile adhesive to fix low porosity ceramic tiles and natural stone on internal & external floor and wall. It is ready to use tile fixing adhesive and needs no curing.

- Marble, Granite, Large Size Tiles
- Door & Window Framing
- Up to 40 ft Wall Application
- Indoor & Outdoor



## BENEFITS

- Ready to use
- Polymer Modified Additives
- High Bond Strength
- Self Curing
- Water Resistant
- Higher Coverage
- Applicator Friendly

# VNC-77 Platinum

Polymer Modified  
**TILE ADHESIVE**

**SHELF LIFE :** 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 2 | EN 12004 C2 TE

### TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey/White Powder	>60 Minutes	>30 Minutes	1.25 N/mm <sup>2</sup>	1.4 N/mm <sup>2</sup>	30-35 Sq.Ft. @3mm Bed Thickness





Polymer Modified  
**TILE ADHESIVE**

# VNC-99

## Multi Purpose

**20kg** NET WEIGHT



## AREAS OF APPLICATION

VENTALO VNC-99 MULTI PURPOSE is a Special Purpose polymer modified cementitious grey/white coloured tile adhesive to fix low porosity ceramic tiles and natural stone on internal & external floor and wall. It is ready to use tile fixing adhesive and needs no curing.

- Marble, Granite, Large Size Tiles
- Door & Window Framing
- Up to 40 ft Wall Application
- Indoor & Outdoor



## BENEFITS

- Ready to use
- Polymer Modified Additives
- High Bond Strength
- Self Curing
- Water Resistant
- Higher Coverage
- Applicator Friendly

# VNC-99

## Multi Purpose

Polymer Modified  
**TILE ADHESIVE**

**SHELF LIFE :** 1 Year From The Date of Mfg.

Conforms to : IS 15477:2019 Type - 1 | EN 12004 C2 TE S1

### TECHICAL SPECIFICATIONS

Packaging Size : 20 kg Bag

PARAMETERS	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (20 Kg Bag)
SPECIFICATION	Grey/White Powder	3-4 Hours	60 Minutes	3.00 N/mm <sup>2</sup>	2.50 N/mm <sup>2</sup>	50-60 Sq.Ft. @3mm Bed Thickness

# Premium EPOXY GROUT



1Kg / 5Kg NET WEIGHT



## AREAS OF APPLICATION

VENTALO EPOXY GROUT is a three-component epoxy based ceramic tile and stone joint filler with Chemical resistant properties. It is used as a high performance epoxy adhesive for grouting in high traffic areas like hospitals factories, garage etc.

- Grouting of all kinds of Tiles & Stone on Wall & Floor, Internal & External
- For Tiles Joints of Width 2 MM-12 MM -Available in Multiple Attractive Colours



# Premium EPOXY GROUT

- BENEFITS**
- Wide Range of Colours
  - Water Resistance
  - Ready to use
  - ACID Resistance
  - Crack Free
  - Shrink Free
  - Easy To Mix & Apply

**COLOUR :** Available in multiple attractive Colours

**SHELF LIFE :** 1 Year From The Date of Mfg.

**Three Components (R+H+F)**

### TECHICAL SPECIFICATIONS

Packaging Size : 1 kg & 5 kg

PARAMETERS	Initial Setting Time	Shrinkage at 7 Days	Compressive Strength at 7 Days	Flexural Strength	Tensile Strength at 7 Days	Water Absorption after 240 Min.
SPECIFICATION	180 - 240 Minutes	<0.10%	>30 Mpa	35-40 N/mm <sup>2</sup>	>10 MPa	0.015 -0.040 gm



# TILE GROUT

Polymer Modified

**1Kg** NET WEIGHT

## AREAS OF APPLICATION

VENTALO TILE GROUT is a polymer modified cementitious tile joint filler adhesive for grouting all kinds of tiles and stone in internal and external areas. It effectively fills gaps and resists dust and water to seep into the back. It is available attractive colour options.

- Grouting of all kinds of Tiles & Stone on Wall & Floor, Internal & External
- For Tiles Joints of Width 1-6 mm
- Available in Multiple Attractive Colours



# TILE GROUT

## Polymer Modified

- BENEFITS**
- Wide Range of Colours
  - Water Resistance
  - Ready to use
  - Self Curing
  - Crack Free
  - Shrink Free
  - Enhances Aesthetics

**COLOUR :** Available in multiple attractive Colours

**SHELF LIFE :** 1 Year From The Date of Mfg.

### TECHICAL SPECIFICATIONS

Packaging Size : 1 kg

PARAMETERS	Pot Life	Bulk Density	Compressive Strength at 28 Days	Flexural Strength at 7 Days
SPECIFICATION	120 min @ 27'c	1.3 to 1.35 kg/Ltr	24 N/mm <sup>2</sup>	5.5 N/mm <sup>2</sup>



# SBR PREMIUM LATEX



## SBR PREMIUM LATEX

**FOR INTERNAL REPAIRS  
& WATERPROOFING**

**250g / 500g / 1Kg** NET WEIGHT

## AREAS OF APPLICATION

VENTALO SBR PREMIUM LATEX is specially derived styrene-butadiene co-polymer latex liquid used along with cement for waterproofing, repairing of concrete and plaster, as a bond coat and for high performance plaster.

- For Internal Concrete Repairs and waterproofing of Toilet & Bathroom
- To Strengthen Old & New Concrete ● As a Bond Coat & For Cladding



# SBR PREMIUM LATEX

**FOR INTERNAL REPAIRS  
& WATERPROOFING**

**BENEFITS** ● Multipurpose Application ● Enhances Bond Strength ● Reduces Permeability  
● Prevents Cracking ● Reduces Shrinkage ● Corrosion Resistance ● Abrasion Resistance

### RECOMMENDED DOSAGE

As a **water** Latex : Cement in prooting coating 1: 15 ratio (Apply 2 coats of the mix)

As a **repair mortar** 10-15% of Latex by weight of cement As a **Bond Coat** Latex : Cement in 1:1 ratio

**SHELF LIFE** : 2 Year From The Date of Mfg.

**SOLID CONTENT** : Higher

### TECHICAL SPECIFICATIONS

Packaging Size : 1 kg & 5 kg

PARAMETERS	Appearance	Specific Gravity at 250 c	pH Value	Pot life	Chemical Resistance	Freeze Resistance
SPECIFICATION	SBR Latex	1.01 + / -0.02	7-9	30-45 mins at 30 c	Resists to mild acids, alkalies, sulphates	Excellent Resistance

# GROUT ADMIX



• 100g / 200g / 500g / 1Kg NET WEIGHT



## AREAS OF APPLICATION

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

## PRODUCT DETAILS

Grout admix is specially designed Latex Admix to be used with sanded & unsanded grout.



# GROUT ADMIX

## BENEFITS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistance
- Reduces water absorption
- Easy to clean

## COVERAGE

Varies by application





500g / 1Kg NET WEIGHT

## AREAS OF APPLICATION

VENTALO TILE CLEANER is a powerful ceramic surface cleaner and stain remover. It is specially formulated to remove tough stains like salts, minerals, cement and other residual particles from the surface of tiles, wash basin, buckets and floors of kitchen, bathrooms, factories, garages etc.

- Ceramic Surface Cleaner & Tough Stains Remover
- Routine Cleaning in Diluted State
- Pre-cleaning of Tile Joints Before Grouting



# TILE CLEANER

## BENEFITS

- Removes Tough Stains
- Fast Acting Formula
- No Etching of Ceramic Products
- No Effect on Tile Glaze
- Cleaning of All Types of Tiles
- Direct & Diluted Application
- Easy to Use. Economical

## PACK SIZE

1Kg

## SHELF LIFE

2 Years from the date of manufacturing.





VISIT US AT

Web : [www.ventalochemical.com](http://www.ventalochemical.com)

**VENTALO CHEMICAL**

S.No. 211/4, Plot No. 2, Shed No. 2, Satnam  
Industrial Estate, Nichi Mandal, Morbi-2 (Guj.)  
Email : [Info@ventalochemical.com](mailto:Info@ventalochemical.com)  
Customer Care No. 72187 73187

**FOLLOW US**

